

Schwank
INNOVATIVE HEATING SOLUTIONS



builderSchwank
Commercial/Industrial Tube Heater



Efficiency, economy and performance in one package

One of the most economical radiant tube heaters on the market for heating distribution and production facilities. Built using Schwank's low cost heating system design, the **builderSchwank** energy efficient heater provides comfort and a quick payback period.

Also Available in 2-Stage [SET] Model

Schwank 2-Stage builder series heater adjusts heat output to meet changing heating needs. This heater lowers energy consumption and increases equipment life by reducing ON-OFF cycles by up to 35%.

Experience Counts: Schwank is the worldwide market leader and most trusted brand with over 2 million heating appliances sold.

Also Available in Pre-Assembled U-Tube P40 Model



Features

- Line voltage and 24 volt thermostat ready
- Whisper-Jet technology makes heater extremely quiet
- Easy access to "clamshell" burner box
- Reflector & end caps improve IR heat
- Emissive coated tubes

Optional Accessories [See back for more details.](#)

- Air Intake Wall Cap
- Horizontal Flue Vent Terminal
- Elbow Kit


Contact us today for a FREE design and quote!

builderSchwank – Technical Specifications, Controls, & Accessories


Information below is intended only as a reference and should not be used when installing equipment. Please ensure you locate the most recent instruction manual for accurate and up to date information.

Clearances to Combustibles

S100 Straight Tube System

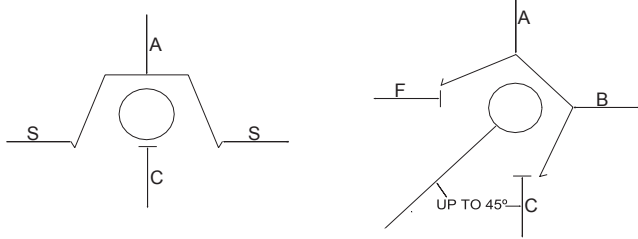


*P40U Packaged U-Tube

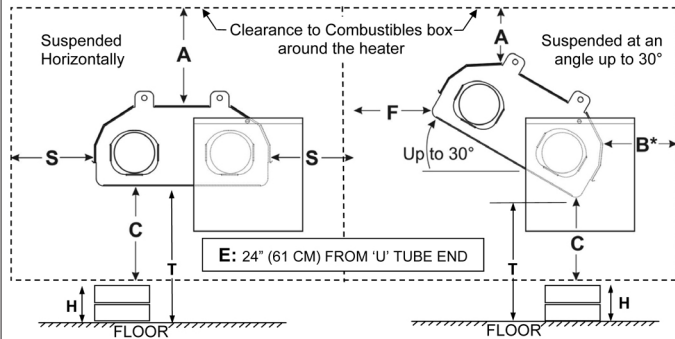


Dimensions and Specifications

S100 Straight Tube System

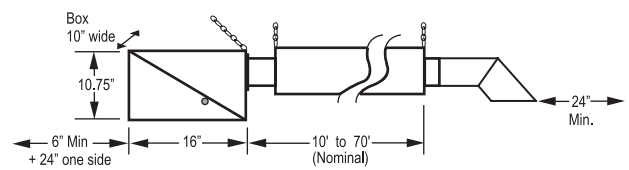

*P40U Packaged U-Tube

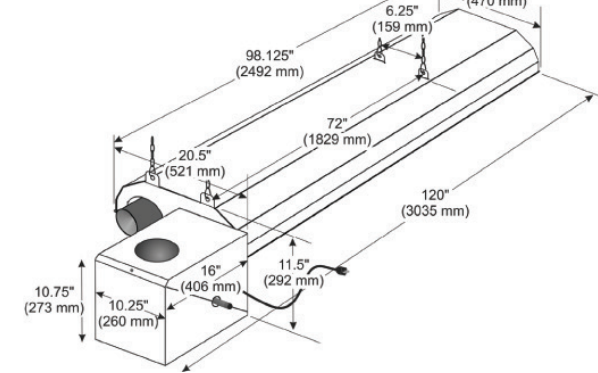


MODEL	SUSPENDED HORIZONTALLY			SUSPENDED AT AN ANGLE UP TO 45°			
	A	S	C	A	B	F	C
S100 [U] 200	14"	44"	76"	13"	6"	74"	70"
S100 [U] 175	13"	42"	74"	12"	6"	72"	68"
S100 [U] 155	11"	34"	70"	10"	4"	50"	64"
S100 [U] 130	10"	32"	65"	10"	3"	45"	60"
S100 [U] 110	9"	30"	60"	9"	3"	36"	54"
S100 [U] 100	11"	32"	68"	10"	4"	57"	68"
S100 [U] 80	7"	24"	42"	7"	2"	31"	38"
S100 [U] 60	7"	20"	34"	7"	2"	25"	34"
S100 [U] 45	7"	16"	32"	7"	2"	29"	32"
P40U*	12"	24"	55"	12"	12"	36"	55"

MODEL	INPUT BTU/HR U.S.A.: SEA LEVEL TO 2,000' CANADA*: SEA LEVEL TO 4,500'	AVAILABLE LENGTH						
		10'	20'	30'	40'	50'	60'	70'
S100 200	200,000					■	■	■
S100 175	175,000					■	■	■
S100 155	155,000				■	■	■	
S100 130	130,000			■	■	■		
S100 110	110,000			■	■	■		
S100 100	100,000		■					
S100 80	80,000		■	■	■			
S100 60	60,000		■	■				
S100 45	45,000		■					
P40U*		■						
HEATER LENGTH		10' 0"	21' 0"	30' 8"	40' 4"	50' 0"	59' 8"	69' 4"
SHIPPING WEIGHT [LBS.]		100	150	200	240	315	360	430

*HIGH ALTITUDE: De-rate heater 4% for each additional 1,000 Ft. of elevation

Gas pressure	Line minimum:	5" W.C. NG	11" W.C. LP
	Line maximum:	14" W.C. NG	14" W.C. LP
	Manifold:	3.5" W.C. NG	10" W.C. LP
Gas inlet	1/2"		
Flue & air vent	4"		
Electrical	120V, 60 Hz, 1.5 AMPS		

Flexible Layout

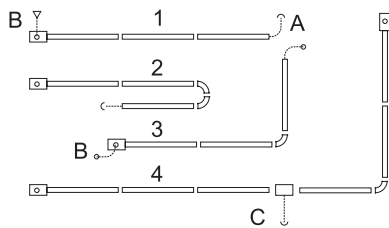

System Configuration

1. Straight line
2. "U" tube with two 90° elbow kits
3. "L" tube with 90° elbow kit
4. Common 6" TEE flue vent

Venting Options

- A. 4" flue vent through wall or roof
- B. 4" intake air from wall or roof
- C. 6" common vent through wall or roof

Optional Accessories

Fresh air intake wall cap	JS-0532-VC
4" Horizontal flue vent terminal (wall)	JA-0528-XX
90° Elbow kit with reflector cap (Combine with two 90° to create 180° elbow)	JS-0508-JZ
#2 Lion chain	JL-0800-XX

Consult your local authorized dealer for other Schwank accessories:

- Line-voltage and 24V thermostat and controls
- Side reflector extensions

Distributor Information:

